


2-5 NM DC POWERED

SMART MARINE LANTERN LN25-DCB

With its sturdy construction and high corrosion-resistant aluminum alloy body, the **LN25-DCB** demonstrates resilience to even the most challenging meteorological conditions. The marine lantern operates using an external DC power supply, visible from a distance of 2-5 nautical miles, with LEDs compliant with IALA Recommendation E200-2 and a lifespan of over 100,000 hours. The marine lantern is available in yellow, red, green or white, in accordance with the color space defined by IALA Recommendation E200-1. It can be configured via IR remote such as flashing rate, flashing mode and intensity.

HIGH QUALITY LENS GROUP

The **LN25-DCB** is equipped with precisely developed optical components to ensure accurate light distribution. Due to the optical components that are compliant with IALA Recommendation E200-1, E200-2 and E200-3, the light's vertical divergence angle is greater than 8 degrees, ensuring smooth visibility from all directions with its 360° lens.

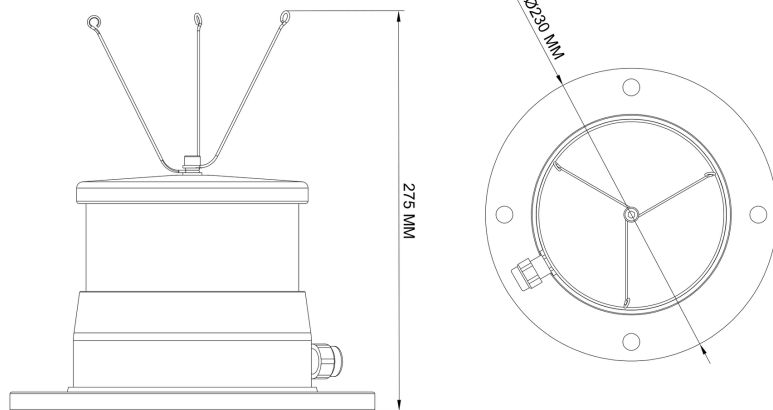

sonar
sea*
LN25-DCB



2-5 NM DC POWERED

SMART MARINE LANTERN LN25-DCB

DIRECT OPERATION WITH 12/24 V POWER SUPPLY

Designed for direct operation on 12/24 V DC systems, the 2-5 NM marine lantern ensures reliable performance without built-in solar panels or batteries.

**sonar
sea**
LN25-DCB

LIGHT FEATURES

LIGHT SOURCE	LED
COLOR OPTIONS	Yellow, Red, Green, White
MAXIMUM LIGHT INTENSITY	Yellow 95 Cd, Red 76 Cd, Green 130 Cd, White 112 Cd
VISUAL RANGE	2-5 NM @ 0.74
HORIZONTAL LIGHT DISTRIBUTION	360°
VERTICAL LIGHT DISTRIBUTION	>8° (±1)
FLASH MODE	Up to 251 IALA compliant, User programmable (Optional)
FLASH TRIGGER MODE	Depending on ambient light, specified time or calculated sunrise and sunset times (Optional)
INTENSITY	Adjustable brightness setting from 1 to 100 as needed
CONTROL	IR remote controller, configuration switches
LED LIFESPAN	>100000 hours
LED	High Quality Power LED
LENS	Clear Polycarbonate

ELECTRICAL FEATURES

NOMINAL VOLTAGE	12 VDC
CIRCUIT PROTECTIONS	Surge Current, Surge Voltage, Overcurrent Protection (OCP) and Reverse Polarity Protection

PHYSICAL FEATURES

BODY MATERIAL	High Quality Electrostatic Powder Coated Marine Grade Aluminium Body
OPTICAL COVER	UV Resistant Acrylic PMMA
INGRESS PROTECTION	IP 68
AMBIENT OPERATING TEMPERATURE	-20 + 60°C
FIXING	Standard 3&4 hole 200 mm PCD bolt pattern for M12 bolts
HEIGHT	270mm, 150mm (without bird spike)
WIDTH	229mm
WEIGHT	3.6 kg

OPTIONS AND STANDARDS

QUALITY MANAGEMENT	ISO 9001:2015
IALA COMPLIANCE	E200-1, E200-2, E200-3, G1065
OPTIONS	RS-422, 50 mm Pole Mount