


5-9 NM DC POWERED

SMART MARINE LANTERN LN59-DCS

With its sturdy construction and high corrosion-resistant aluminum alloy body, the **LN59-DCS** demonstrates resilience to even the most challenging meteorological conditions. The marine lantern operates using an external DC power supply, visible from a distance of 5-9 nautical miles, with LEDs compliant with IALA Recommendation E200-2 and a lifespan of over 100,000 hours. The marine lantern is available in yellow, red, green or white, in accordance with the color space defined by IALA Recommendation E200-1. It can be configured via IR remote such as flashing rate, flashing mode and intensity and synchronize its flashing pattern via its high quality built-in GPS receiver.

HIGH QUALITY LENS GROUP

The **LN59-DCS** is equipped with precisely developed optical components to ensure accurate light distribution. Due to the optical components that are compliant with IALA Recommendation E200-1, E200-2 and E200-3, the light's vertical divergence angle is greater than 8 degrees, ensuring smooth visibility from all directions with its 360° lens.

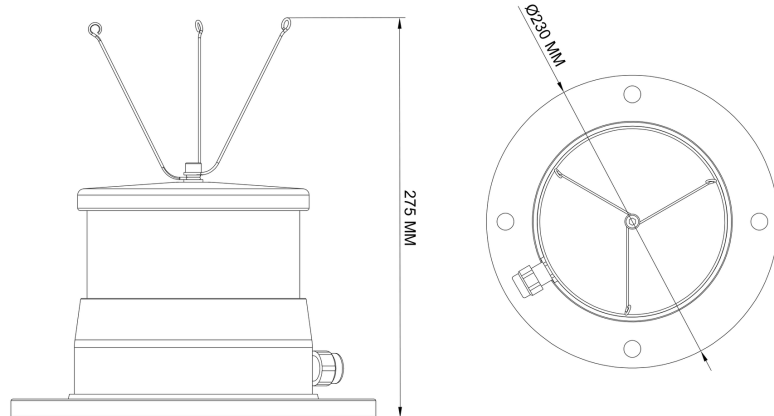

INTERNAL GPS

The LN series smart marine lantern can flash synchronously using the built-in high quality GPS receiver. Additionally, the **LN59-DCS** can calculate sunrise and sunset times for its current location every day, due to its Sync Start and Stop feature. It begins flashing at sunset time and stops at sunrise eliminating timing errors across various locations, slopes, angles, or light conditions, ensuring consistent flashing between sunset and sunrise. Multiple LN series smart marine lanterns in the same location can start and stop flashing simultaneously.

sonar
sea
LN59-DCS

GPS SYNC



5-9 NM DC POWERED SMART MARINE LANTERN LN59-DCS

DIRECT OPERATION WITH 12/24 V POWER SUPPLY

Designed for direct operation on 12/24 V DC systems, the 5-9 NM GPS synchronized marine lantern ensures reliable performance.

**sonar
sea**
LN59-DCS

LIGHT FEATURES

LIGHT SOURCE	LED
COLOR OPTIONS	Yellow, Red, Green, White
MAXIMUM LIGHT INTENSITY	Yellow 389 Cd, Red 352 Cd, Green 480 Cd, White 450 Cd
VISUAL RANGE	5-8 NM @ 0.74
HORIZONTAL LIGHT DISTRIBUTION	360°
VERTICAL LIGHT DISTRIBUTION	>10° (±1)
FLASH MODE	Up to 251 IALA compliant, User programmable (Optional)
FLASH TRIGGER MODE	Depending on ambient light, specified time or calculated sunrise and sunset times (Optional)
INTENSITY	Adjustable brightness setting from 1 to 100 as needed
CONTROL	IR remote controller, configuration switches
LED LIFESPAN	>100000 hours
LED	High Quality Power LED
LENS	Clear Polycarbonate

ELECTRICAL FEATURES

NOMINAL VOLTAGE	12 VDC
CIRCUIT PROTECTIONS	Surge Current, Surge Voltage, Overcurrent Protection (OCP) and Reverse Polarity Protection

PHYSICAL FEATURES

BODY MATERIAL	High Quality Electrostatic Powder Coated Marine Grade Aluminium Body
OPTICAL COVER	UV Resistant Acrylic PMMA
INGRESS PROTECTION	IP 68
AMBIENT OPERATING TEMPERATURE	-20 + 60°C
FIXING	Standard 3&4 hole 200 mm PCD bolt pattern for M12 bolts
HEIGHT	270mm, 150mm (without bird spike)
WIDTH	229mm
WEIGHT	4.3 kg

OPTIONS AND STANDARDS

QUALITY MANAGEMENT	ISO 9001:2015
IALA COMPLIANCE	E200-1, E200-2, E200-3, G1065
OPTIONS	RS-422, 50 mm Pole Mount